




FLAVORBLAST™

FOUNTAIN BEVERAGE ENHANCER



ENDURO 250
WITH FLAVORBLAST™

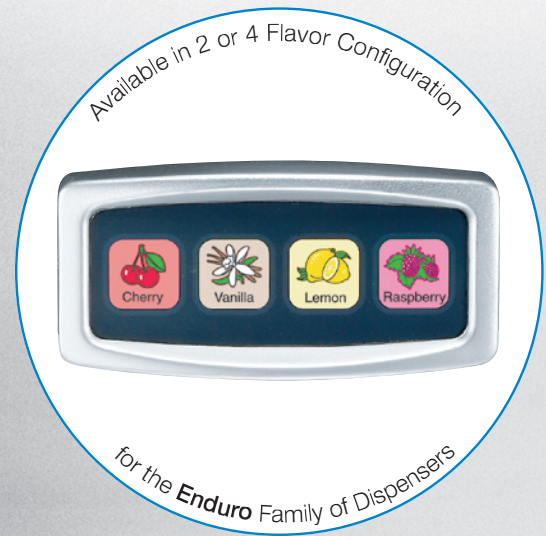

FEATURES:

- Easy-to-use selection buttons add a “Blast” of flavor to fountain beverages
- Option for Enduro Ice Drink Dispensers with lighted merchandisers
- Simple to retrofit kit onto existing Enduro Ice Drink Dispensers or order as an option on new Enduro Ice Drink Dispensers
- Enduro 300 can be equipped with dual flavor modules
- FlavorBlast™ dispense is adjustable by time and flow rate, allowing the dispense to be tailored to customer or operator needs
- Separate dispensing nozzle for FlavorBlast™ Flow control provides positive shutoff that eliminates dripping at the nozzle

FLAVORBLAST™ FOUNTAIN BEVERAGE ENHANCER

CUSTOMER BENEFITS

- Choice – Customers can create their own individualized drinks
- Greatly increases flavor selections, enhancing customer satisfaction
- Fun for customers to experiment and create custom drinks

OWNER/OPERATOR BENEFITS

- Drive incremental sales and increase profits
- Add another dimension to the fountain offering
- Attract customers to profitable fountain beverages
- Simple to maintain and easy to use
- Auto-purge mode eliminates flavor carry over
- Proven components maximize reliability
- Saves valuable counter space
- FlavorBlast™ complies with the Americans with Disabilities Act (ADA)

ENDURO FAMILY	
PART NUMBER	DESCRIPTION
621055533	ED150BC, 6 UFB-1™ valves, 2-4 oz push button
621055535	ED175BC, 8 UFB-1™ valves, 2-4 oz sanitary lever
621055545	ED200BC, 8 UFB-1™ valves, 2-4 oz push button
621055559	ED250BC, 10 UFB-1™ valves, 2-4 oz sanitary lever
621055573	ED300BC, 12 UFB-1™ valves, 2-4 oz push button

* Equipment above contains 4 Button Flavor Blast Generic Graphics. All models available in 2 button Flavor Blast. All models available with your choice of valve configurations. The above listing is only a small portion of available equipment. For a complete product listing, please contact customer care.

TECHNICAL SPECIFICATIONS:

DISPENSE TIME RANGE. 1-4 seconds

FACTORY SETTING. 1 second

DISPENSE FLOW RATE RANGE. . . 0.2-0.5 oz/sec

FACTORY SETTING. 0.5 oz/sec

SYRUP Ambient

SOLENOID ARRANGEMENT. Enduro 150 and 175:
front to back
Enduro 200 and 250:
side by side
Enduro 300:
front to back

INSTALLATION KITS ARE

AVAILABLE, CONSISTING OF. BIB pumps for each flavor,
tubing and hardware.
A secondary regulator is
required with pressure set
at 25-30 psi (172-207 kpa)

RETROFIT KIT

SHIPPING WEIGHT Enduro 150 and 175:
25 lb (11.3 kg)
Enduro 200 and 250:
30 lb (13.6 kg)
Enduro 300:
40 lb (18.1 kg)



IN THE U.S.A.
Ph: 800.238.3600
Fax: 763.488.4283

OUTSIDE THE U.S.A.
Ph: 763.488.8200
Fax: 763.488.4283

101 Broadway Street West
Osseo, MN 55369
www.cornelius.com